



INFOLD DOOR

EN 14428:2015+A1:2018

EN 12150-1:2013 (glass in building)

EN ISO7599 (anodizing of aluminium and its alloys)

6mm Toughened Safety Glass

25mm Profile Adjustment

1950mm Height

ClearVue Glass Coating

Reversible

Metal Handle

Ultra Clear Seals

Press Fit Seal Designs

Cover Caps


Magnetic Close

Pre-assembled door frame


Shower Tray or Wetroom Compatible

25mm Compensating Profile Available


20 Year Lifetime Guarantee Against Manufacturing Defects*

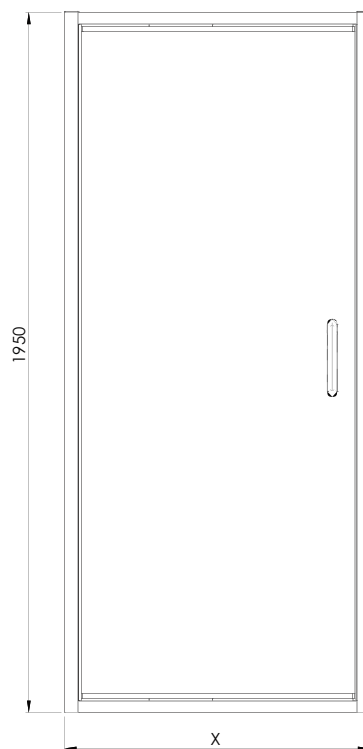

INFOLD - DOOR OPEN POSITION MEASUREMENTS



INFOLD DOOR SIZE (mm)	INTERIOR SIZE (mm)	EXTERIOR SIZE (mm)
700	264	278
800	264	378
900	371	372
1000	371	472

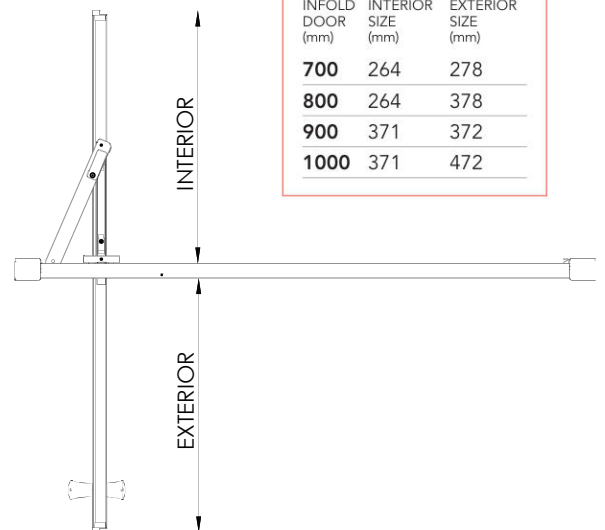

SPECIFICATIONS

PRODUCT SIZE	ADJUSTMENT X (MIN - MAX)	DOOR ACCESS	WEIGHT	PRODUCT CODE			
				SILVER	BLACK**	BRUSHED BRASS	GUNMETAL**
700**	650 - 700mm	486mm	26kg	ILIIF70SC	ILIIF70BC	ILIIF70BRBC	ILIIF70GMC
800	750 - 800mm	586mm	29kg	ILIIF80SC	ILIIF80BC	ILIIF80BRBC	ILIIF80GMC
900	850 - 900mm	686mm	33kg	ILIIF90SC	ILIIF90BC	ILIIF90BRBC	ILIIF90GMC
1000	950 - 1000mm	786mm	36kg	ILIIF100SC	ILIIF100BC	ILIIF100BRBC	ILIIF100GMC

+353 42 966 8000 | flairshowers.com | sales@flairshowers.com

All data presented may be subjected to change without prior notice. Flair Showers does the best it can to provide accurate information. Flair Showers unfortunately cannot guarantee this, and accept no liability for any information / advice given.

* Excludes perishable items such as rollers, seals, hinges, etc.

** Not available in Republic Of Ireland

